


Vision is
our mission®

Product Data



Dimensions

Units in mm

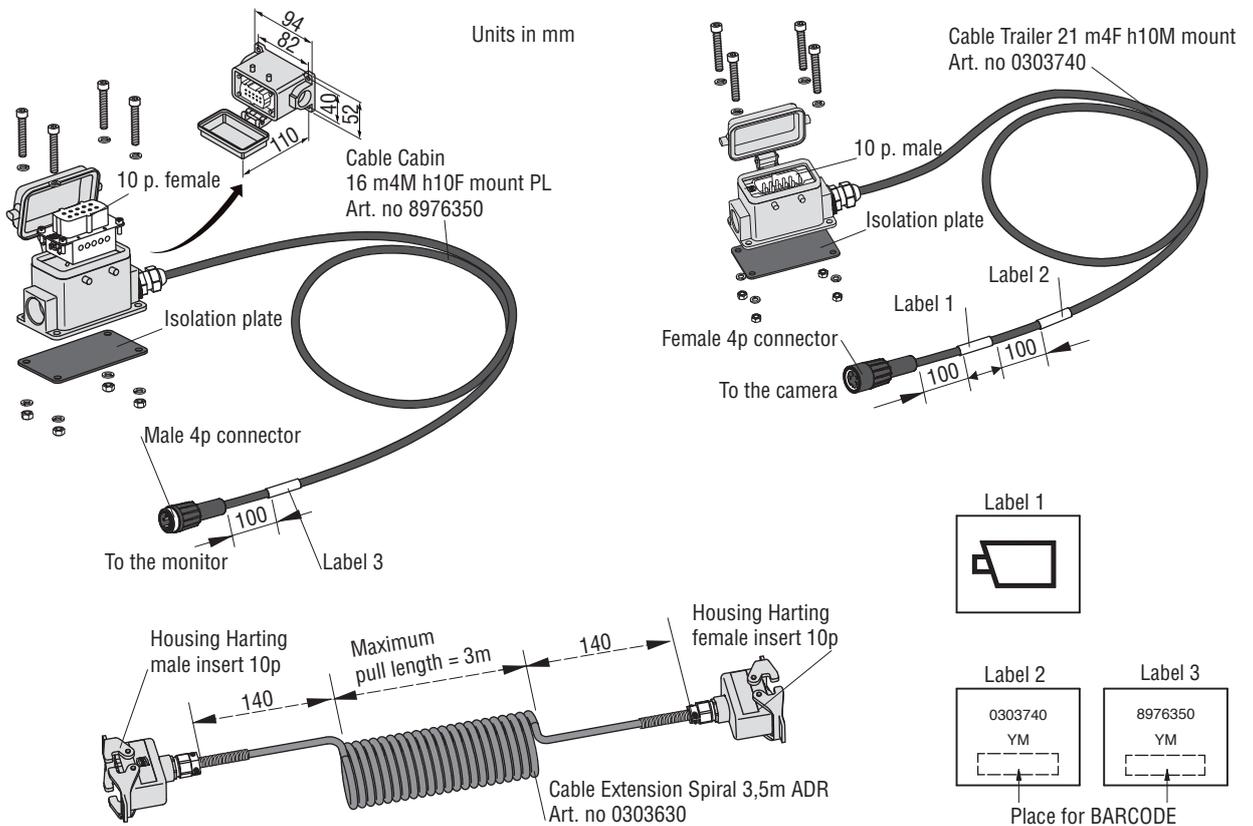


TECHNICAL DATA

Set Cable for Centre Axle Trailer Trailer Manual

	Description
Article number	0303980
Operating temperature	-40°C to +85°C.
Protection	IP 67 according to IEC 60529 and vibrationproof.
Weight	4,5kg.
Cables	Art. No. 1220110: 1 x coax, 2 x power, 1 x data, black. Art. No. 2220700, 2 x coax + 5 x wires AWG20 + overall shielding.
Mounting material	8 x Hexagon socket head cap screw M5 x 35, 16 x Spring washer DIN 126 B5, 8 x Hex nut M5, Isolation plate rubber for Housing Harting.




Installation

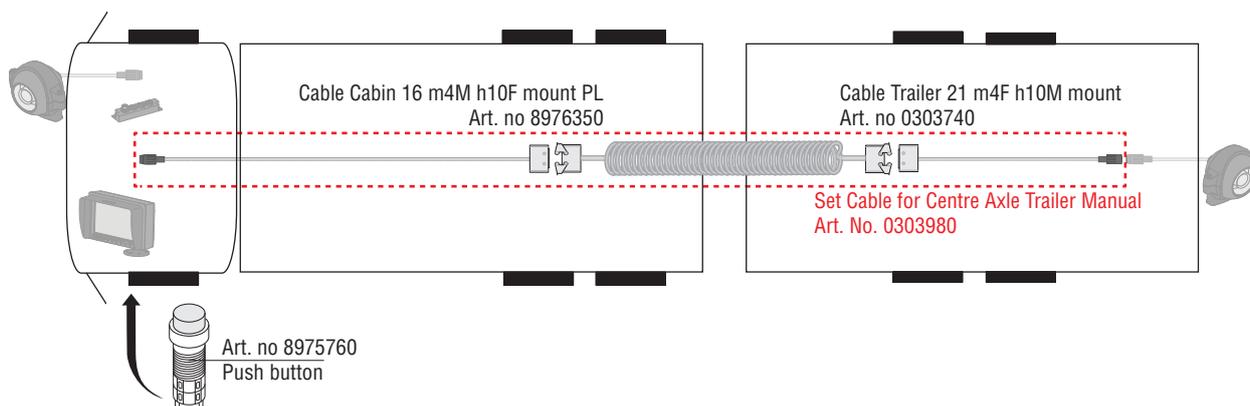


Electrical connection

Soldering of connectors

- | | |
|--------------------|---------------|
| 1 = coax | = video |
| 2 = coax shielding | = video GND |
| 3 = Red | = Power input |
| 4 = Black | = 0V |
| 5 - 9 | = N.C. |
| 10 = Shielding | |





Front side molded male connector, Art No 1312001



Front side molded female connector, Art No 1310841

Connection Push button



X1 = 24V/DC
X2 = GND

All data subject to change without notice. All dimensions are for commercial purpose only.
The camera/display systems from Orlaco comply with the latest CE, ADR, EMC and mirror-directive regulations, where applicable.
All products are manufactured in accordance with the ISO 9001 quality management system, ISO/TS 16949 quality automotive, ISO 14001 environmental management systems and all Ex products with the IECEx scheme and ATEX directives, where applicable.

